APE
best *for* you



CLOS BEIGE RECT 60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042344	60,4X120,8	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



ANTI-SLIP CLOS BEIGE RECT

60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042348	60,4X120,8	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



CLOS BEIGE RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042345	60,4X90,6	9,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



ANTI-SLIP CLOS BEIGE RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042349	60,4X90,6	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

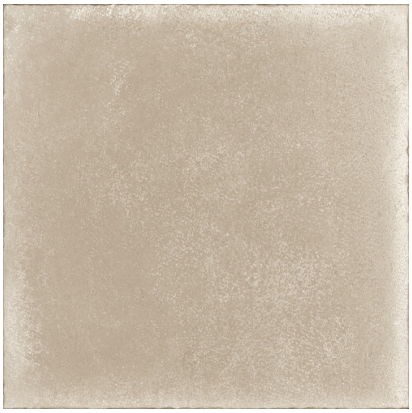

CLOS BEIGE RECT 60,4X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042346	60,4X60,4	9,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42


apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS BEIGE RECT 60,4X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042350	60,4X60,4	9,60	PC BIA GL

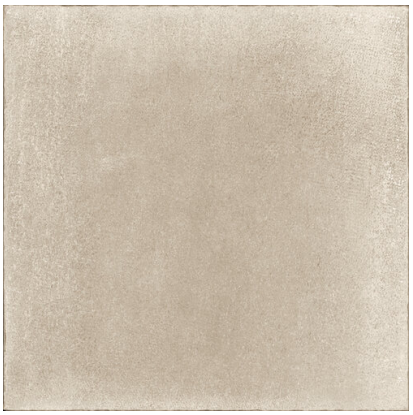

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

CLOS BEIGE RECT 30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042347	30,2X60,4	9,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS BEIGE RECT

30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042351	30,2X60,4	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES		
Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES		
Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES		
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS		
Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



MOSAICO CLOS BEIGE 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043208	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3 CLOS BEIGE 33X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042508	33X120,8	32,00	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



CLOS BIANCO RECT 60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041802	60,4X120,8	9,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

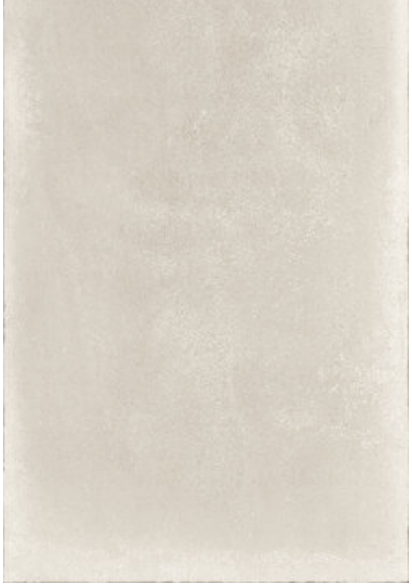

ANTI-SLIP CLOS BIANCO RECT 60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042236	60,4X120,8	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

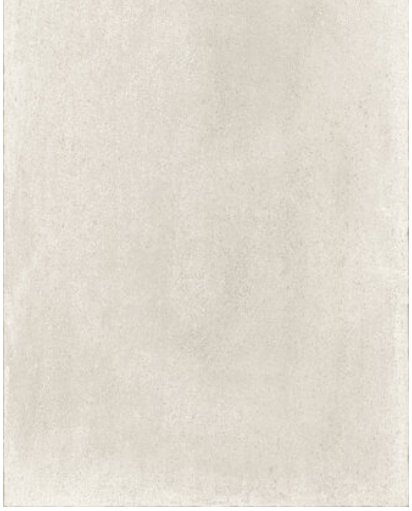

CLOS BIANCO RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041805	60,4X90,6	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

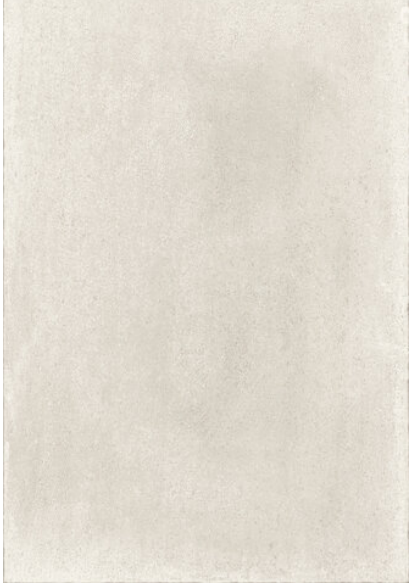

ANTI-SLIP CLOS BIANCO RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042240	60,4X90,6	9,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

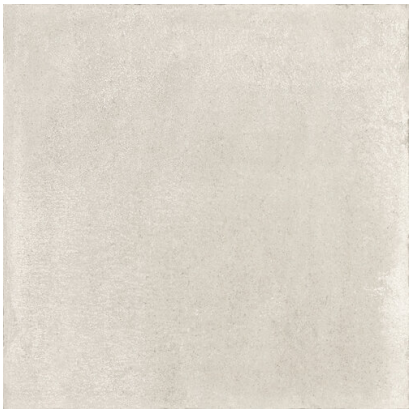

CLOS BIANCO RECT 60,4X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041808	60,4X60,4	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS


Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS BIANCO RECT 60,4X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042243	60,4X60,4	9,20	PC BIA GL

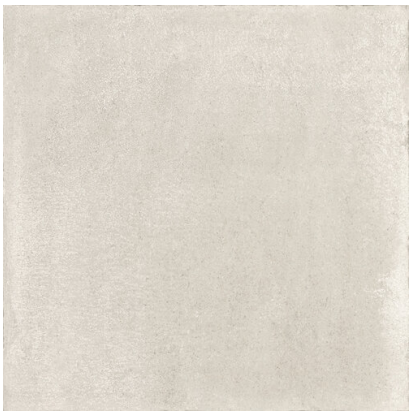

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

CLOS BIANCO RECT 30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041811	30,2X60,4	9,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS BIANCO RECT

30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042246	30,2X60,4	9,30	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES		
Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES		
Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES		
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS		
Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



MOSAICO CLOS BIANCO 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043209	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3 CLOS BIANCO 33X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042233	33X120,8	32,30	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



CLOS CENERE RECT 60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041804	60,4X120,8	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



ANTI-SLIP CLOS CENERE RECT 60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042238	60,4X120,8	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



CLOS CENERE RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041807	60,4X90,6	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



ANTI-SLIP CLOS CENERE RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042241	60,4X90,6	9,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

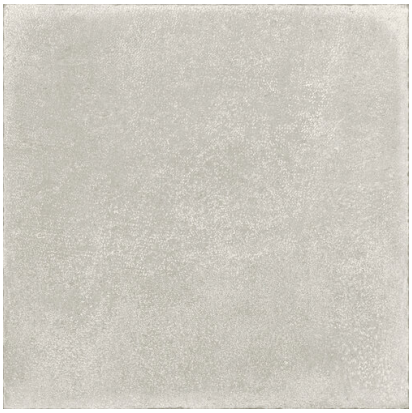

CLOS CENERE RECT 60,4X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041810	60,4X60,4	9,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS


Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS CENERE RECT 60,4X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042244	60,4X60,4	9,40	PC BIA GL

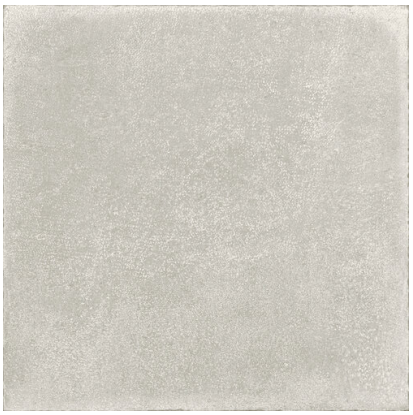

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

CLOS CENERE RECT 30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041813	30,2X60,4	9,10	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS CENERE RECT

30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042247	30,2X60,4	8,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



MOSAICO CLOS CENERE 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043210	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3 CLOS CENERE 33X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042234	33X120,8	32,30	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5


ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

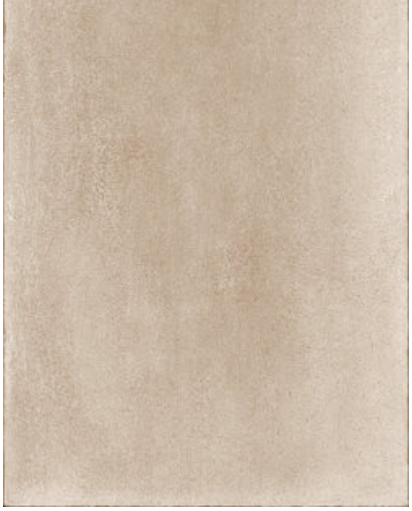

CLOS TERRA RECT 60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041803	60,4X120,8	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

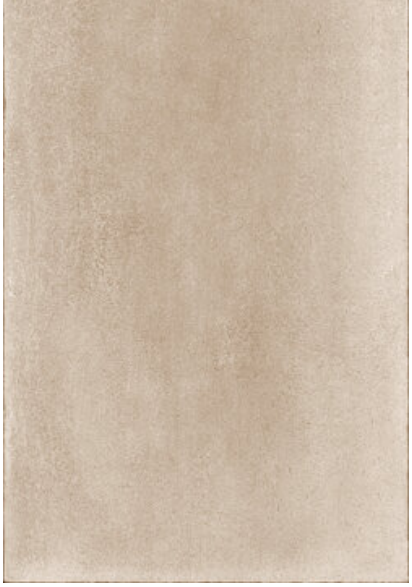

ANTI-SLIP CLOS TERRA RECT

60,4X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042239	60,4X120,8	9,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



CLOS TERRA RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041806	60,4X90,6	9,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



ANTI-SLIP CLOS TERRA RECT 60,4X90,6

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042242	60,4X90,6	9,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

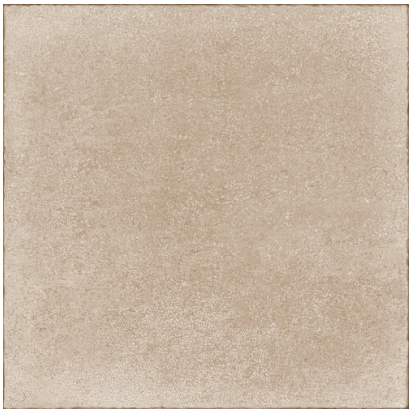

CLOS TERRA RECT 60,4X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041809	60,4X60,4	9,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3


ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS TERRA RECT 60,4X60,4

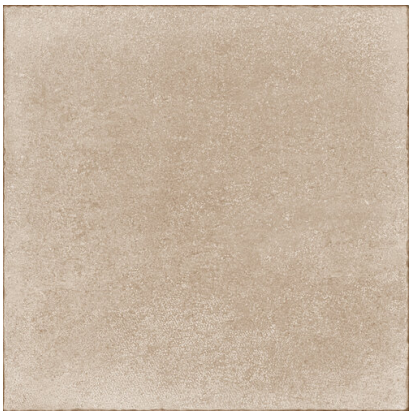

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042245	60,4X60,4	9,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

CLOS TERRA RECT 30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041812	30,2X60,4	9,10	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (DCOF)	ANSI A326.3	0,42

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP CLOS TERRA RECT

30,2X60,4

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042248	30,2X60,4	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES		
Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES		
Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 44 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES		
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS		
Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	0,55

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



MOSAICO CLOS TERRA 30X30 (5X5)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043211	30X30	0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3 CLOS TERRA 33X120,8

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A042235	33X120,8	32,30	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.