

## NIGHT LUX SOFT A 163X323X1,2

| REFERENCE      | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|----------------|-------------|----------------|-----------|
| <b>A041832</b> | 163X323X1,2 | 12,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 47 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES


|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 3   |

### ANTI-SLIP CHARACTERISTICS

|                        |             |      |
|------------------------|-------------|------|
| Slip resistance (DCOF) | ANSI A326.3 | 0,42 |
|------------------------|-------------|------|

## NIGHT LUX SOFT B 163X323X1,2

| REFERENCE      | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|----------------|-------------|----------------|-----------|
| <b>A041842</b> | 163X323X1,2 | 12,00          | PC BIA GL |

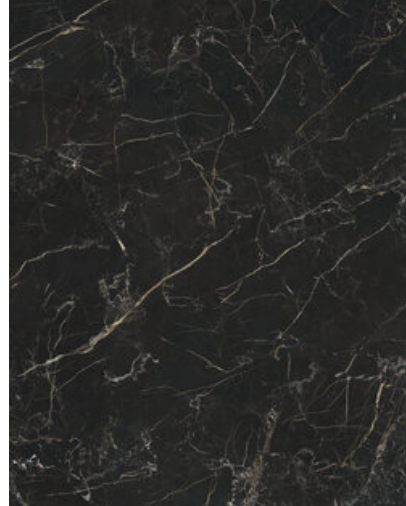

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

### CHEMICAL PROPERTIES

## NIGHT LUX POL A 163X323X1,2

| REFERENCE      | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|----------------|-------------|----------------|-----------|
| <b>A041838</b> | 163X323X1,2 | 12,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 47 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to cleaning products                        | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 3  |

## NIGHT LUX POL B 163X323X1,2

| REFERENCE      | SIZE (cm)   | THICKNESS (mm) | GROUP     |
|----------------|-------------|----------------|-----------|
| <b>A041846</b> | 163X323X1,2 | 12,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 47 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to cleaning products                        | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 3  |

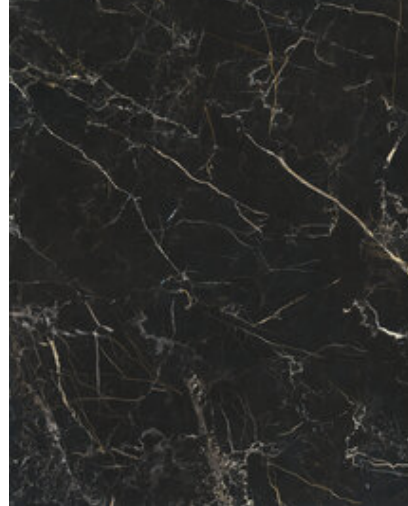

## NIGHT LUX SOFT RECT 120X280

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040833</b> | 120X280   | 6,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 40 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to cleaning products                        | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 3  |

## NIGHT LUX POL RECT 120X280

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039513</b> | 120X280   | 6,00           | PC BIA GL |

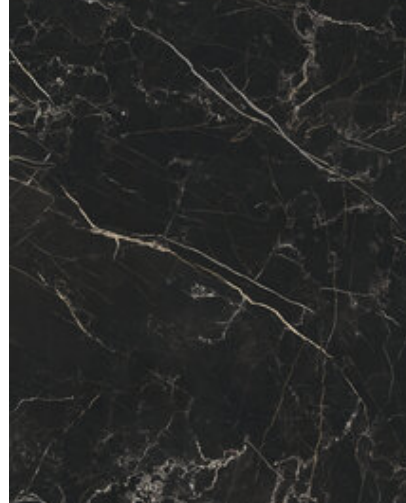

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                           |                 |                         |
|---------------------------|-----------------|-------------------------|
| Water absorption capacity | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance        | EN ISO 10545-04 | => 40 N/mm <sup>2</sup> |
| Thermal shock resistance  | EN ISO 10545-09 | It stands the test      |
| Frost resistance          | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |



## NIGHT LUX MATT RECT 120X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A041790</b> | 120X120   | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 45 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES


|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                        |             |      |
|------------------------|-------------|------|
| Slip resistance (DCOF) | ANSI A326.3 | 0,42 |
|------------------------|-------------|------|

## NIGHT LUX MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A036980</b> | 60X120    | 9,20           | PC BIA GL |

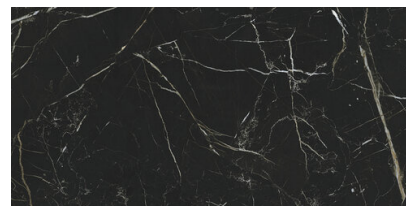

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 45 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 9                       |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |


### ANTI-SLIP CHARACTERISTICS

|                        |             |      |
|------------------------|-------------|------|
| Slip resistance (DCOF) | ANSI A326.3 | 0.42 |
|------------------------|-------------|------|



## NIGHT LUX POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038116</b> | 60X120    | 9,00           | PC BIA GL |

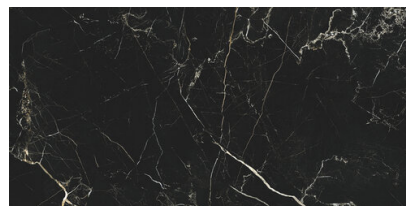

### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

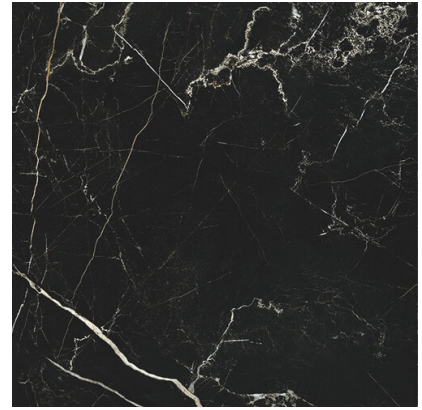

## NIGHT LUX MATT RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A037202</b> | 60X60     | 8,60           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 45 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |
| Light Reflectance Value (LRV)        |                 | 9                       |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                        |             |      |
|------------------------|-------------|------|
| Slip resistance (DCOF) | ANSI A326.3 | 0.42 |
|------------------------|-------------|------|

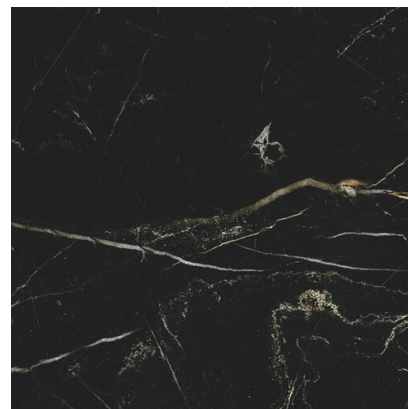

## NIGHT LUX POL RECT 60X60

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040071</b> | 60X60     | 8,20           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

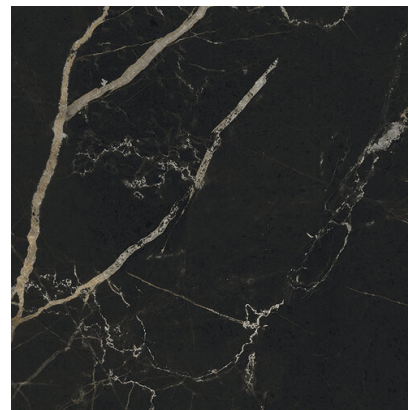

## NIGHT LUX 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A045346</b> | 15X15     | 7,40           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | I                       |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 4   |

## MANDALAY WHITE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A039185</b> | 60X120    | 10,40          | PC BIA GL |

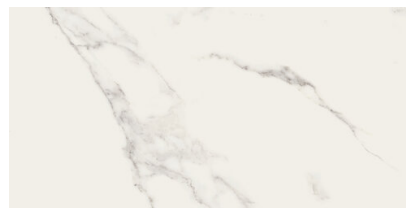

### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GLB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |



## LAVABO DE PIE ROMA

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040867</b> |           | 0,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES