

SUPREME MARBLE MATT RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043182	60X120	8,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alkalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP SUPREME MARBLE STRU RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043184	60X120	8,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alkalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R10

SUPREME MARBLE POL RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043026	60X120	9,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alkalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

VOLPE MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043028	60X120	9,40	PC BIA GL

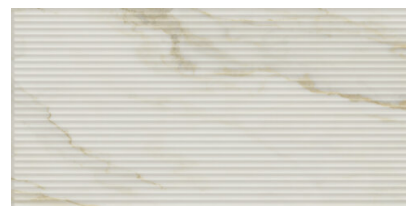

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test


CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

SUPREME MARBLE MATT RECT

90X90

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044304	90X90	9,40	PC BIA GL

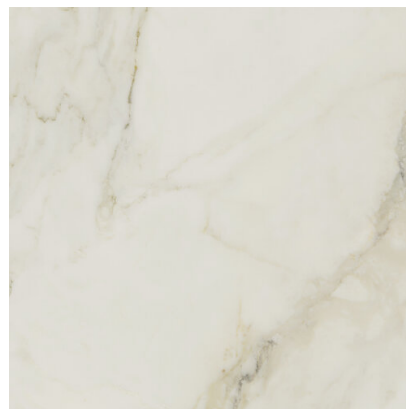

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

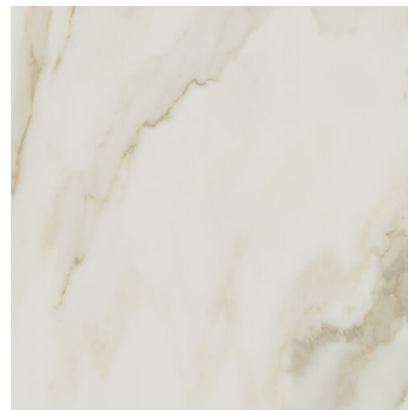

SUPREME MARBLE R10 RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044260	60X60	8,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (R)	EN 16165-B	R10
---------------------	------------	-----

PELDAÑO RECTO ANT. C3 SUPREME MARBLE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043262	33X120	32,30	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C



LAVABO DE PIE ROMA

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040867		0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES