

## ROUGE MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038468</b> | 60x120    | 9,20           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## ROUGE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038475</b> | 60x120    | 9,20           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## WICKER ROUGE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038481</b> | 60x120    | 9,80           | PC BIA GL |

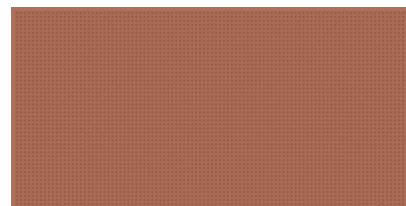

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR WALLPAPER ROUGE 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038617</b> | 60x120    | 10,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CRETONNE ROUGE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038862</b> | 60x120    | 9,30           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CALACATTA SLOW MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038507</b> | 60x120    | 10,40          | PC BIA GL |

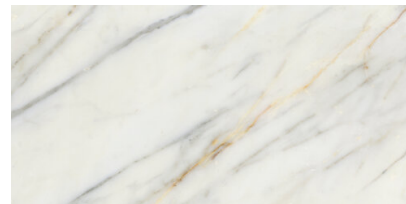

### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

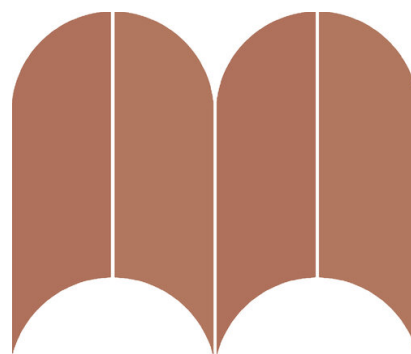

## MALLA TEAR ROUGE MIX 37,3X24,5


| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038614</b> | 37,3X24,5 | 9,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

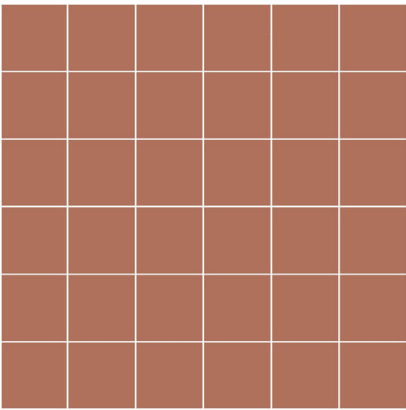

MOSAICO ROUGE MATT 30X30 (5X5)

|           |           |                |           |
|-----------|-----------|----------------|-----------|
| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
| A038603   | 30X30     | 8,80           | PC BIA GL |

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

MOLDURA ROUGE MATT 2X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP   |
|-----------|-----------|----------------|---------|
| A038597   | 2X60      | 12,80          | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

CHEMICAL PROPERTIES

## TIDE MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038466</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## TIDE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038473</b> | 60x120    | 9,60           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## WICKER TIDE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038479</b> | 60x120    | 9,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR WALLPAPER TIDE 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038618</b> | 60x120    | 10,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CRETONNE TIDE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038863</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## ONYX SLOW POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038510</b> | 60x120    | 10,40          | PC BIA GL |

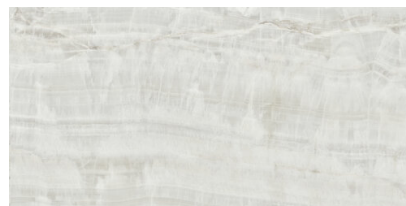

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

MALLA TEAR TIDE MIX 37,3X24,5

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A038749   | 37,3X24,5 | 9,90           | PC BIA GL |




DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

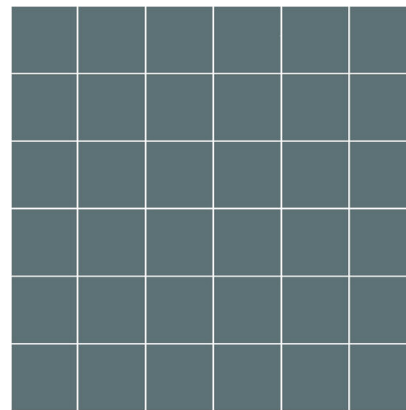

## MOSAICO TIDE MATT 30X30 (5X5)

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038605</b> | 30X30     | 10,00          | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

MOLDURA TIDE MATT 2X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP   |
|-----------|-----------|----------------|---------|
| A038599   | 2X60      | 12,80          | REVESTI |

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

CHEMICAL PROPERTIES



## HEXAGON ONYX SLOW 13,9X16

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038710</b> | 13,9X16   | 9,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES


|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |

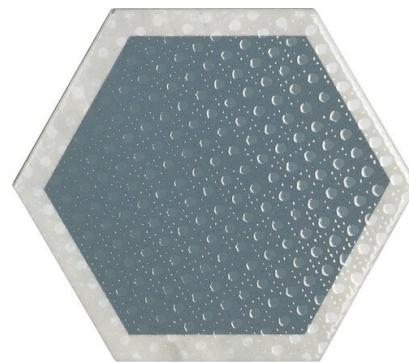

## HEXA BOHO ONYX SLOW 13,9X16

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038711</b> | 13,9X16   | 8,50           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | II                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## CHAMPAGNE MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038464</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## CHAMPAGNE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038470</b> | 60x120    | 9,20           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## WICKER CHAMPAGNE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038476</b> | 60x120    | 9,20           | PC BIA GL |

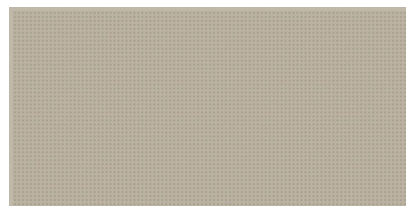

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR WALLPAPER ROUGE 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038617</b> | 60x120    | 10,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CRETONNE ROUGE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038862</b> | 60x120    | 9,30           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CALACATTA SLOW POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038508</b> | 60x120    | 10,60          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |


### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |

## MALLA TEAR CHAMPAGNE MIX

### 37,3X24,5

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038748</b> | 37,3X24,5 | 10,40          | PC BIA GL |

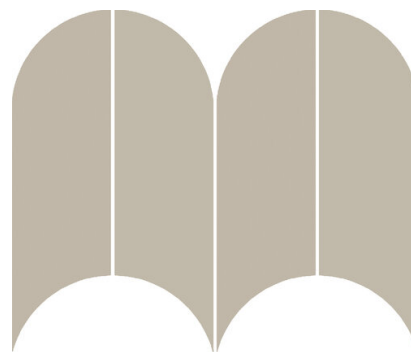

#### DIMENSIONS AND SURFACE PROPERTIES


#### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

#### CHEMICAL PROPERTIES

## MOSAICO CHAMPAGNE MATT 30X30 (5X5)

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038602</b> | 30X30     | 9,50           | PC BIA GL |

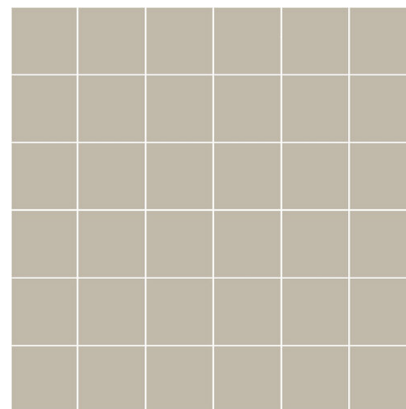

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

MOLDURA CHAMPAGNE MATT 2X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP   |
|-----------|-----------|----------------|---------|
| A038596   | 2X60      | 12,80          | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

CHEMICAL PROPERTIES

## TURQUOISE MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038465</b> | 60x120    | 9,10           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## TURQUOISE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038472</b> | 60x120    | 9,00           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## WICKER TURQUOISE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038478</b> | 60x120    | 8,90           | PC BIA GL |

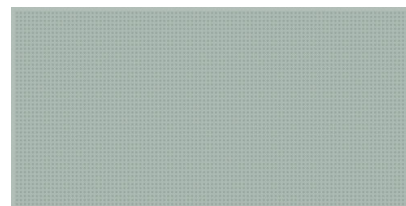

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR WALLPAPER TIDE 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038618</b> | 60x120    | 10,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CRETONNE TIDE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038863</b> | 60x120    | 8,90           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## TINT TURQUOISE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038574</b> | 60x120    | 9,30           | PC BIA GL |

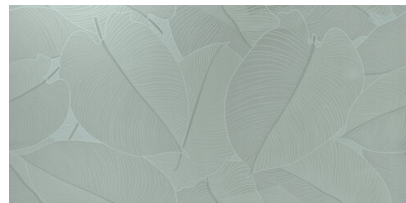

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## ONYX SLOW MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038509</b> | 60x120    | 10,30          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GLA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## MALLA TEAR TURQUOISE MIX

### 37,3X24,5

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038615</b> | 37,3X24,5 | 9,70           | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES


#### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

#### CHEMICAL PROPERTIES

## MOSAICO TURQUOISE MATT 30X30 (5X5)

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038604</b> | 30X30     | 10,40          | PC BIA GL |

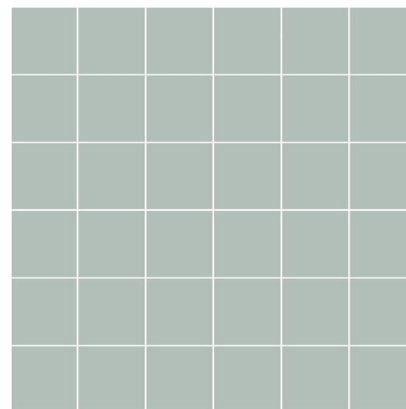

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

MOLDURA TURQUOISE MATT 2X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP   |
|-----------|-----------|----------------|---------|
| A038598   | 2X60      | 12,80          | REVESTI |

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

CHEMICAL PROPERTIES

## FORTUNE MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038469</b> | 60x120    | 9,10           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## FORTUNE POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038471</b> | 60x120    | 9,80           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## WICKER FORTUNE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038477</b> | 60x120    | 9,70           | PC BIA GL |

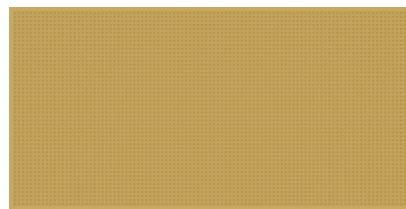

### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO 10545-07 | III                     |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR WALLPAPER TIDE 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038618</b> | 60x120    | 10,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CRETONNE FORTUNE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038864</b> | 60x120    | 9,30           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CALACATTA SLOW POL RECT

### 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038508</b> | 60x120    | 10,60          | PC BIA GL |



#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | IV                      |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |    |
|--------------------------------------------------------|-----------------|----|
| Resistance to acids                                    | EN ISO 10545-13 | GA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA |
| Stains resistance                                      | EN ISO 10545-14 | 5  |

## HEXAGON CALACATTA SLOW

### 13,9X16



| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038712</b> | 13,9X16   | 8,40           | PC BIA GL |

#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## HEXA BOHO CALACATTA SLOW

### 13,9X16



| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038713</b> | 13,9X16   | 8,30           | PC BIA GL |

#### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 30 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

MALLA TEAR FORTUNE MIX  
37,3X24,5

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A038616   | 37,3X24,5 | 9,70           | PC BIA GL |



DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## MOSAICO FORTUNE MATT 30X30 (5X5)

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038607</b> | 30X30     | 9,20           | PC BIA GL |

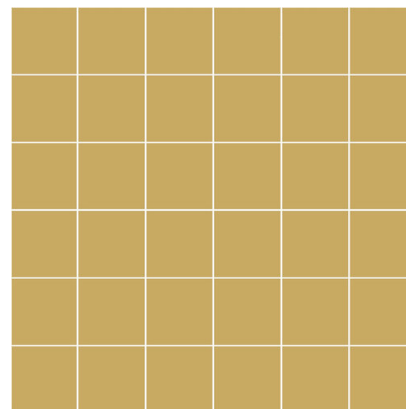

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

MOLDURA FORTUNE MATT 2X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP   |
|-----------|-----------|----------------|---------|
| A038601   | 2X60      | 12,80          | REVESTI |



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

CHEMICAL PROPERTIES

## LEAD MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038467</b> | 60x120    | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

#### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

#### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alkalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## LEAD POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038474</b> | 60x120    | 9,50           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## WICKER LEAD RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038480</b> | 60x120    | 9,70           | PC BIA GL |

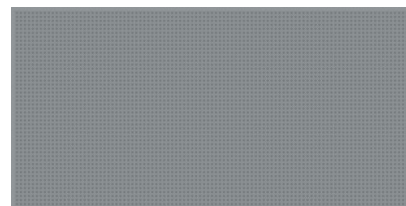

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DAMASCUS POL RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038570</b> | 60x120    | 9,80           | PC BIA GL |

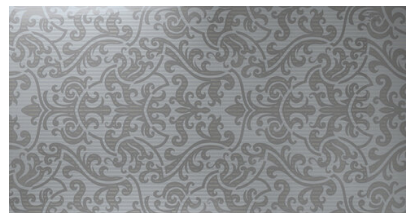

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GHB |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHB |
| Resistance to cleaning products                        | EN ISO 10545-13 | GHB |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GHB |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

## DECOR WALLPAPER TIDE 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038618</b> | 60x120    | 10,00          | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CRETONNE FORTUNE RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038864</b> | 60x120    | 9,30           | PC BIA GL |



### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## CALACATTA SLOW MATT RECT 60X120

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038507</b> | 60x120    | 10,40          | PC BIA GL |

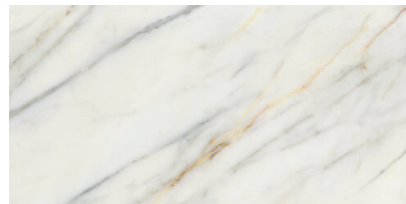

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requirements |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

MALLA TEAR LEAD MIX 37,3X24,5

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A038750   | 37,3X24,5 | 9,90           | PC BIA GL |




DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

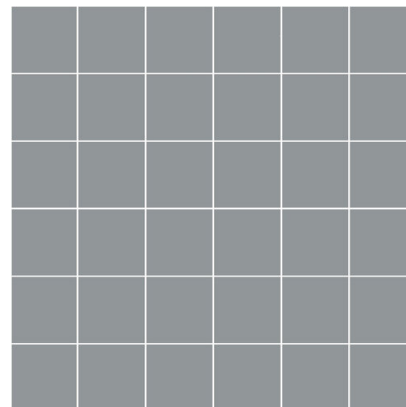

## MOSAICO LEAD MATT 30X30 (5X5)

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038606</b> | 30X30     | 10,40          | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

MOLDURA LEAD MATT 2X60

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP   |
|-----------|-----------|----------------|---------|
| A038600   | 2X60      | 12,80          | REVESTI |

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

|                  |                 |                   |
|------------------|-----------------|-------------------|
| Frost resistance | EN ISO 10545-12 | Not pass the test |
|------------------|-----------------|-------------------|

CHEMICAL PROPERTIES



## DAHLIA DAY 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038629</b> | 15X15     | 7,80           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## VIOLET DAY 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038630</b> | 15X15     | 7,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## JASMINE DAY 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038632</b> | 15X15     | 7,60           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## PANSY DAY 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038633</b> | 15X15     | 7,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## DAISY DAY 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038634</b> | 15X15     | 7,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## DAHLIA NIGHT 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038622</b> | 15X15     | 9,00           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## VIOLET NIGHT 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038623</b> | 15X15     | 7,90           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## JASMINE NIGHT 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038625</b> | 15X15     | 7,80           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES


|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|

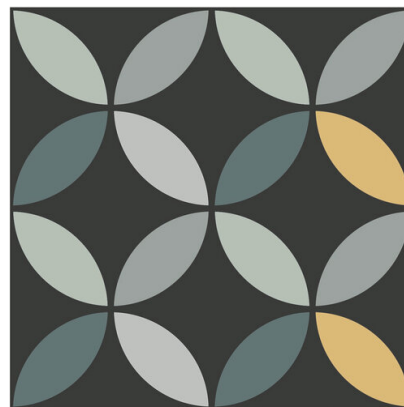

## PANSY NIGHT 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038626</b> | 15X15     | 8,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES

|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|



## DAISY NIGHT 15X15

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A038627</b> | 15X15     | 7,70           | PC BIA GL |

### DIMENSIONS AND SURFACE PROPERTIES

|                                                             |              |                                  |
|-------------------------------------------------------------|--------------|----------------------------------|
| Size, thickness, side straightness, flatness, orthogonality | UNE-EN 14411 | It accomplished all requeriments |
|-------------------------------------------------------------|--------------|----------------------------------|

### PHYSICAL PROPERTIES

|                                      |                 |                         |
|--------------------------------------|-----------------|-------------------------|
| Water absorption capacity            | EN ISO 10545-03 | < 0,5%                  |
| Flexion resistance                   | EN ISO 10545-04 | => 35 N/mm <sup>2</sup> |
| Abrasion resistance (glazed Ceramic) | EN ISO10545-07  | III                     |
| Thermal shock resistance             | EN ISO 10545-09 | It stands the test      |
| Cracking resistance                  | EN ISO 10545-11 | It stands the test      |
| Frost resistance                     | EN ISO 10545-12 | It stands the test      |

### CHEMICAL PROPERTIES


|                                                        |                 |     |
|--------------------------------------------------------|-----------------|-----|
| Resistance to acids                                    | EN ISO 10545-13 | GLA |
| Resistance to alcalis                                  | EN ISO 10545-13 | GHA |
| Resistance to cleaning products                        | EN ISO 10545-13 | GA  |
| Resistance to chemical products in swimming pool water | EN ISO 10545-13 | GA  |
| Stains resistance                                      | EN ISO 10545-14 | 5   |

### ANTI-SLIP CHARACTERISTICS

|                      |                |      |
|----------------------|----------------|------|
| Slip resistance (Rd) | UNE-EN 16165-C | 0.00 |
|----------------------|----------------|------|

## LAVABO NISO IZQ.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040865</b> |           | 0,00           | PC BIA GL |

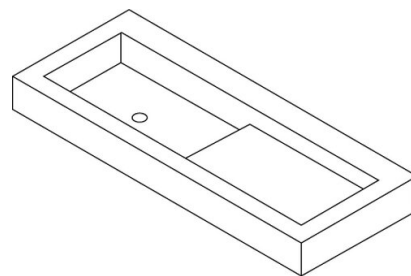

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

LAVABO NISO DCHA.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040866   |           | 0,00           | PC BIA GL |

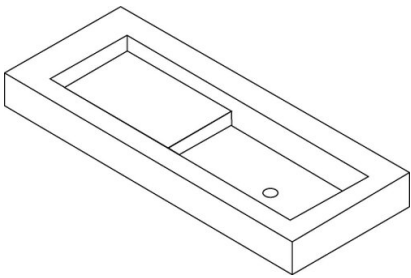

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

LAVABO DE PIE ROMA

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040867   |           | 0,00           | PC BIA GL |

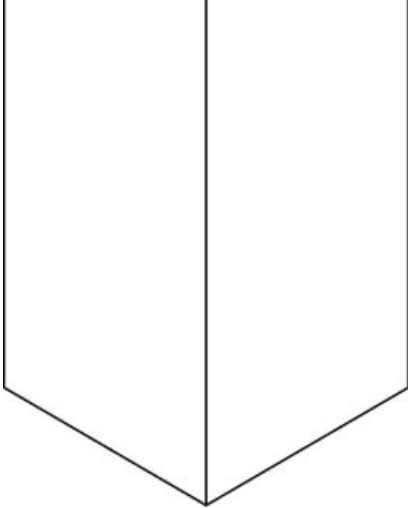

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

LAVABO AXEL IZQ.

| REFERENCE | SIZE (cm) | THICKNESS (mm) | GROUP     |
|-----------|-----------|----------------|-----------|
| A040868   |           | 0,00           | PC BIA GL |

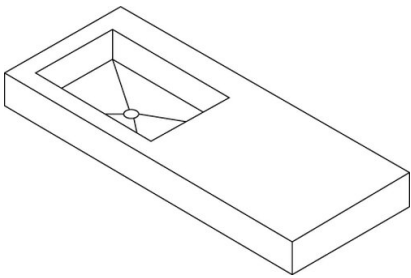

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

CHEMICAL PROPERTIES

## LAVABO AXEL DCHA.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040869</b> |           | 0,00           | PC BIA GL |

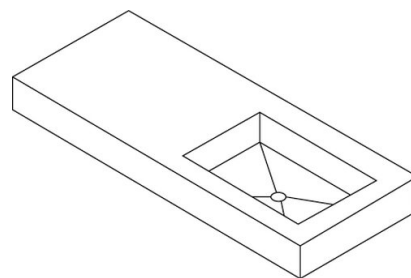

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO AXEL CEN.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040870</b> |           | 0,00           | PC BIA GL |

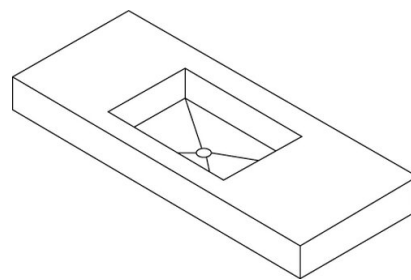

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO AXEL DOBLE 160

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040871</b> |           | 0,00           | PC BIA GL |

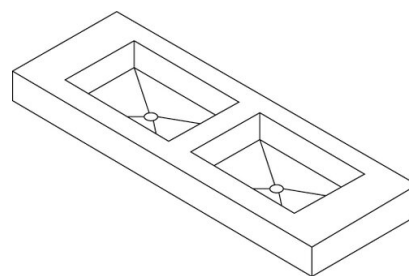

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA IZQ.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040872</b> |           | 0,00           | PC BIA GL |

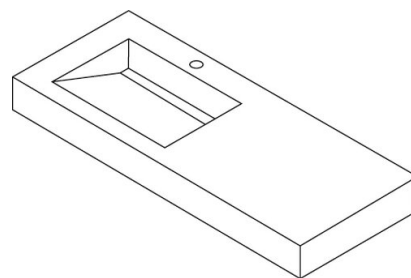

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA DCHA.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040873</b> |           | 0,00           | PC BIA GL |

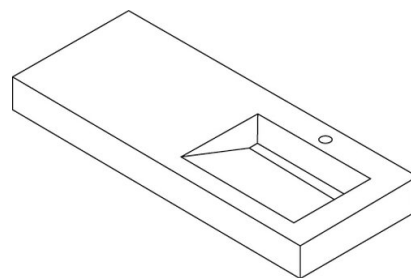

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA CEN.

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040874</b> |           | 0,00           | PC BIA GL |

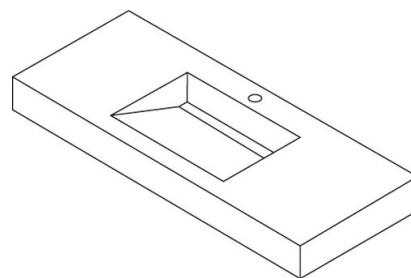

### DIMENSIONS AND SURFACE PROPERTIES


### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES

## LAVABO ENEA DOBLE 160

| REFERENCE      | SIZE (cm) | THICKNESS (mm) | GROUP     |
|----------------|-----------|----------------|-----------|
| <b>A040875</b> |           | 0,00           | PC BIA GL |

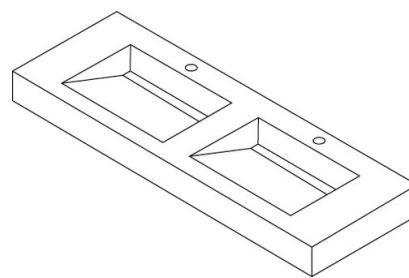

### DIMENSIONS AND SURFACE PROPERTIES

### PHYSICAL PROPERTIES

|                  |                 |                    |
|------------------|-----------------|--------------------|
| Frost resistance | EN ISO 10545-12 | It stands the test |
|------------------|-----------------|--------------------|

### CHEMICAL PROPERTIES