

VERSE WHITE RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043870	120X280	6,00	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42



VERSE WHITE RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043878	120X120	8,80	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE WHITE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044310	60X120	8,10	PC BIA UGL

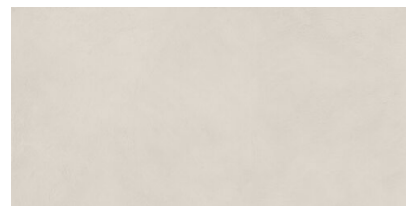

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42



POEME WHITE RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044877	60X60	8,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

MALLA VERSE WHITE 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044606	36,3X30	8,40	PC BIA GL

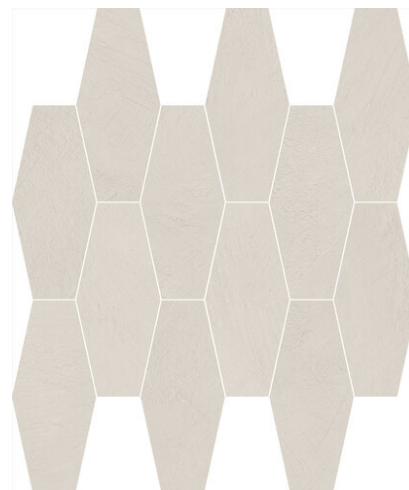

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

M-STICK VERSE WHITE 30X30
(14,3X1,4)

Table with 4 columns: REFERENCE, SIZE (cm), THICKNESS (mm), GROUP. Row 1: A044614, 30X30, 8,70, PC BIA GL.

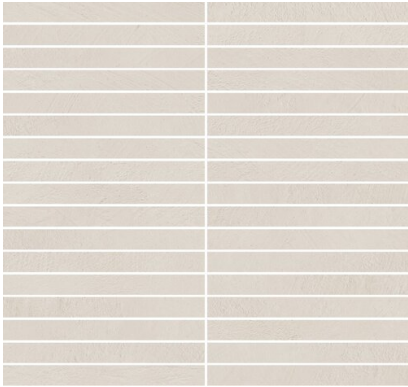

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Table with 3 columns: Frost resistance, EN ISO 10545-12, It stands the test.

CHEMICAL PROPERTIES

POEME WHITE RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044644	40X120	10,10	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

BACH WHITE RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044648	40X120	12,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

LLICH WHITE RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044652	40X120	10,80	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

KANIK WHITE RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044658	40X120	12,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

HESSE WHITE RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044656	40X120	12,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

VERSE SAND RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043872	120X280	6,00	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42



VERSE SAND RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043880	120X120	8,80	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

ANTI-SLIP VERSE SAND RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044308	120X120	8,70	PC BIA UGL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175mm3
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE SAND RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044312	60X120	7,80	PC BIA UGL

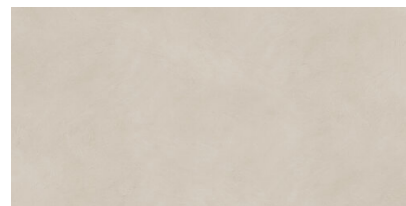

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

ANTI-SLIP VERSE SAND RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044319	60X120	7,90	PC BIA UGL

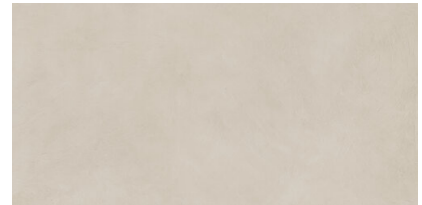

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175mm3
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C
Slip resistance (DCOF)	ANSI A326.3	>0,42

POEME SAND RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044879	60X60	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES



MALLA VERSE SAND 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044608	36,3X30	8,10	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

M-STICK VERSE SAND 30X30 (14,3X1,4)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044616	30X30	8,50	PC BIA GL

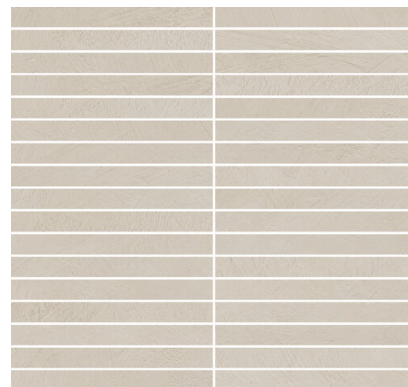

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

POEME SAND RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044646	40X120	10,40	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

BACH SAND RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044650	40X120	12,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

LLICH SAND RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044654	40X120	10,80	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

VERSE CLAY RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043873	120X280	6,00	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42



VERSE CLAY RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043881	120X120	8,80	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE CLAY RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044313	60X120	8,20	PC BIA UGL

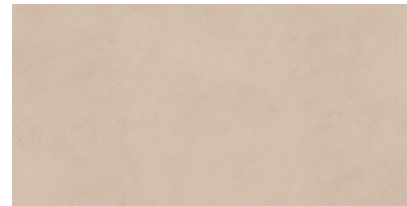

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

POEME CLAY RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044878	60X60	8,90	PC BIA GL

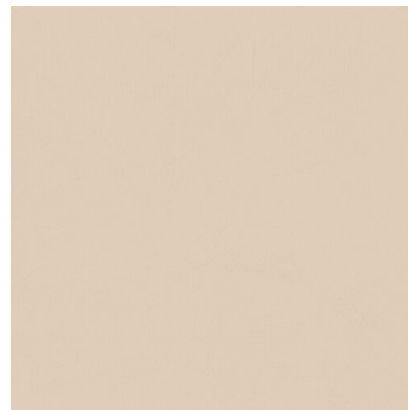

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

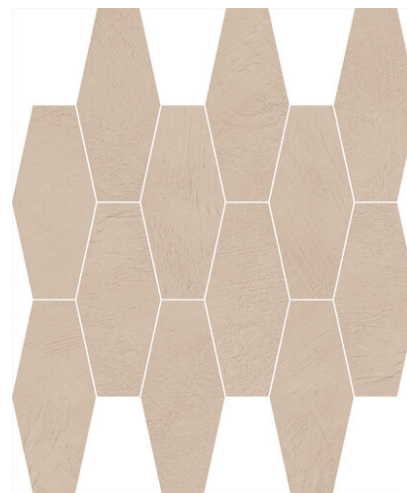

MALLA VERSE CLAY 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044612	36,3X30	8,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

M-STICK VERSE CLAY 30X30 (14,3X1,4)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044620	30X30	8,40	PC BIA GL

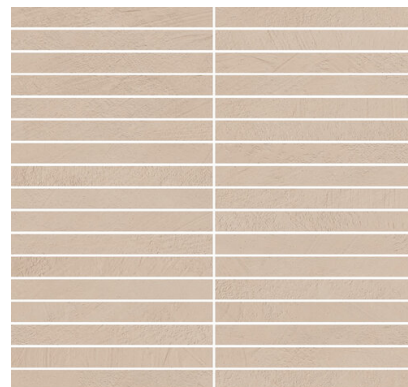

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

POEME CLAY RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044645	40X120	10,40	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

BACH CLAY RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044649	40X120	12,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

LLICH CLAY RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044653	40X120	10,40	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

VERSE MUD RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043877	120X280	6,00	PC BIA UGL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42



VERSE MUD RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043885	120X120	8,80	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE MUD RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044317	60X120	8,70	PC BIA UGL

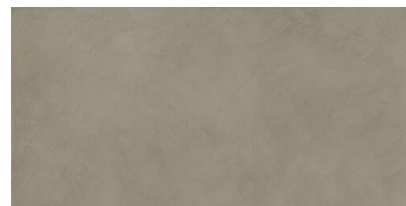

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

POEME MUD RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A045217	60X60	8,90	PC BIA GL

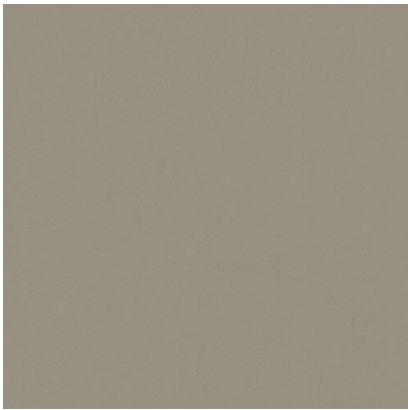


DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistanceEN ISO 10545-12It stands the test

CHEMICAL PROPERTIES

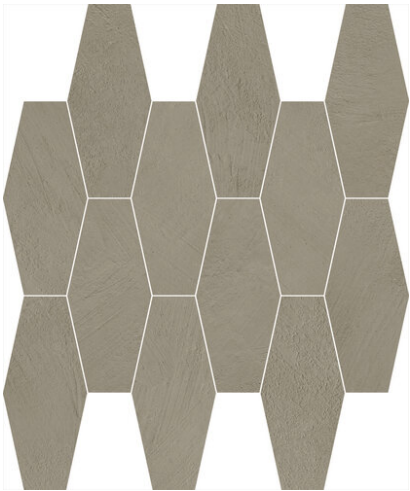

MALLA VERSE MUD 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044609	36,3X30	8,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

M-STICK VERSE MUD 30X30 (14,3X1,4)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044617	30X30	8,30	PC BIA GL

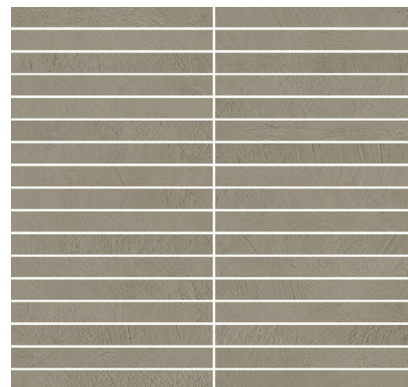

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

POEME MUD RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044647	40X120	10,40	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

BACH MUD RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044651	40X120	12,00	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

LLICH MUD RECT 40X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044655	40X120	10,70	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=>12 N/mm ²
Cracking resistance	EN ISO 10545-11	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GLB
Resistance to cleaning products	EN ISO 10545-13	GB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GB
Stains resistance	EN ISO 10545-14	3

VERSE CREAM RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043874	120X280	6,30	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

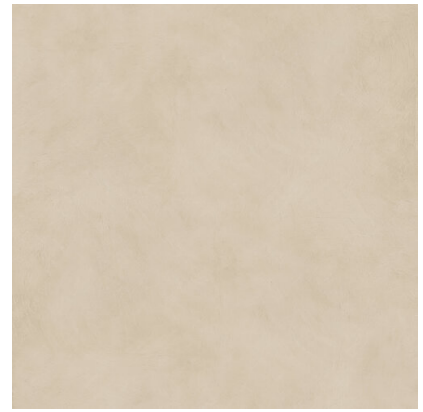

VERSE CREAM RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043882	120X120	8,30	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

ANTI-SLIP VERSE CREAM RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044309	120X120	8,10	PC BIA UGL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175mm3
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE CREAM RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044314	60X120	8,20	PC BIA UGL

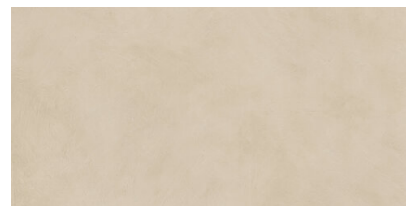

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

ANTI-SLIP VERSE CREAM RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044320	60X120	8,20	PC BIA UGL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175mm3
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C
Slip resistance (DCOF)	ANSI A326.3	>0,42

MALLA VERSE CREAM 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044610	36,3X30	8,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

M-STICK VERSE CREAM 30X30
(14,3X1,4)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044618	30X30	8,70	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistanceEN ISO 10545-12It stands the test

CHEMICAL PROPERTIES

VERSE ASH RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043871	120X280	6,00	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42



VERSE ASH RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043879	120X120	8,80	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alkalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

ANTI-SLIP VERSE ASH RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044307	120X120	8,70	PC BIA UGL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175mm ³
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE ASH RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044311	60X120	7,90	PC BIA UGL

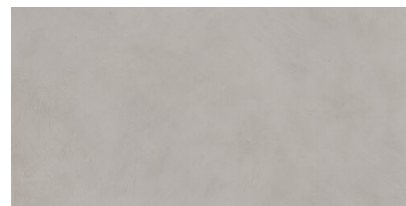

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

ANTI-SLIP VERSE ASH RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044318	60X120	7,90	PC BIA UGL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175mm3
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C
Slip resistance (DCOF)	ANSI A326.3	>0,42

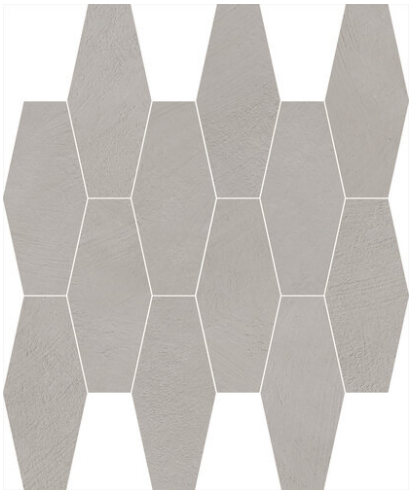

MALLA VERSE ASH 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044607	36,3X30	7,90	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES

M-STICK VERSE ASH 30X30 (14,3X1,4)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044615	30X30	8,60	PC BIA GL

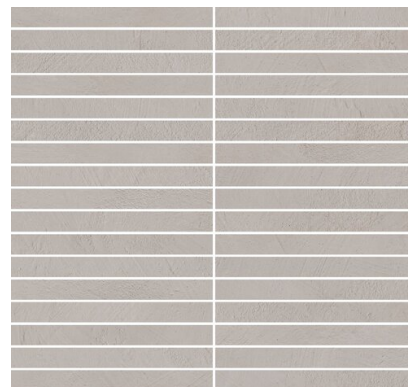

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

VERSE MOCHA RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043876	120X280	6,00	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42



VERSE MOCHA RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043884	120X120	8,80	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE MOCHA RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044316	60X120	8,10	PC BIA UGL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

MALLA VERSE MOCHA 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044613	36,3X30	8,40	PC BIA GL

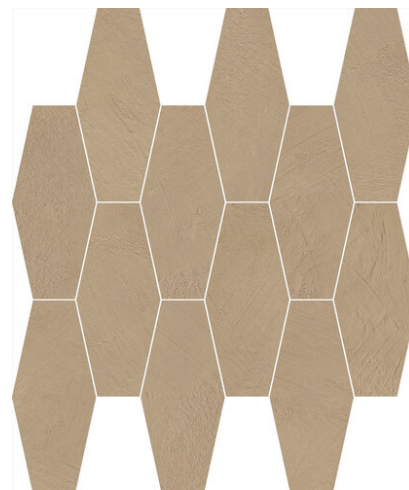

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

M-STICK VERSE MOCHA 30X30 (14,3X1,4)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044621	30X30	9,20	PC BIA GL

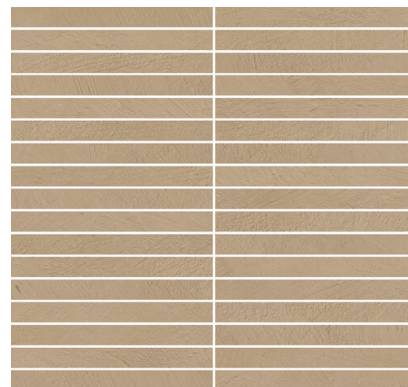

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

VERSE COTTO RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043875	120X280	6,00	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

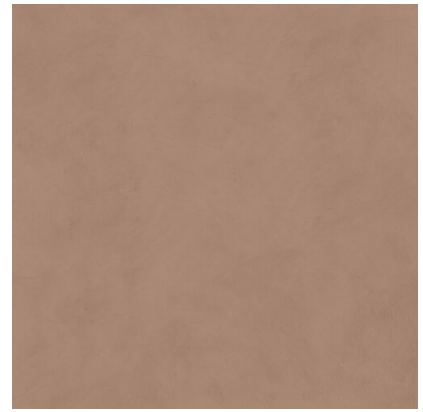

VERSE COTTO RECT 120X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043883	120X120	8,80	PC BIA UGL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

VERSE COTTO RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044315	60X120	8,20	PC BIA UGL

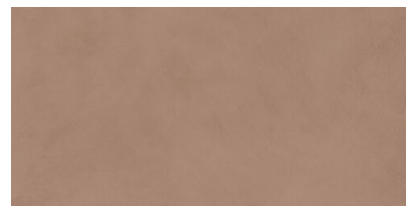

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Deep abrasion resistance	EN ISO 10545-06	<175
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	UB
Resistance to alcalis	EN ISO 10545-13	UB
Resistance to cleaning products	EN ISO 10545-13	UB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	UB

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 2
Slip resistance (R)	EN 16165-B	R10
Slip resistance (barefeet)	EN 16165-A	B
Slip resistance (DCOF)	ANSI A326.3	>0,42

MALLA VERSE COTTO 36,3X30 (HEXA)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044611	36,3X30	8,40	PC BIA GL

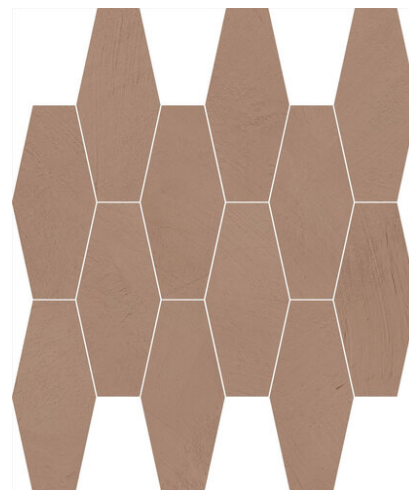

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

M-STICK VERSE COTTO 30X30 (14,3X1,4)

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044619	30X30	8,30	PC BIA GL

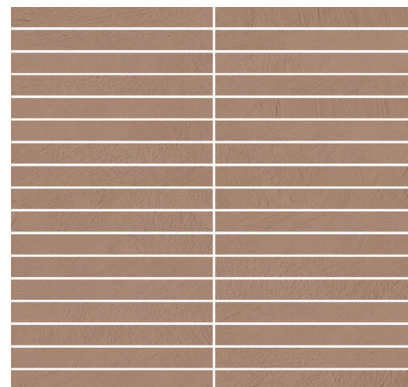

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test
------------------	-----------------	--------------------

CHEMICAL PROPERTIES



DECOR FOREST I 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043929	120X280	6,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES



DECOR FOREST II 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043930	120X280	6,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES