APE
best *for* you



CALACATTA SLOW SOFT A 163X323X1,2

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041836	163X323X1,2	12,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 47 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (DCOF)	ANSI A326.3	0,42

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



CALACATTA SLOW SOFT B
163X323X1,2

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A041844	163X323X1,2	12,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 47 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3


ANTI-SLIP CHARACTERISTICS

Slip resistance (DCOF)	ANSI A326.3	0,42

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

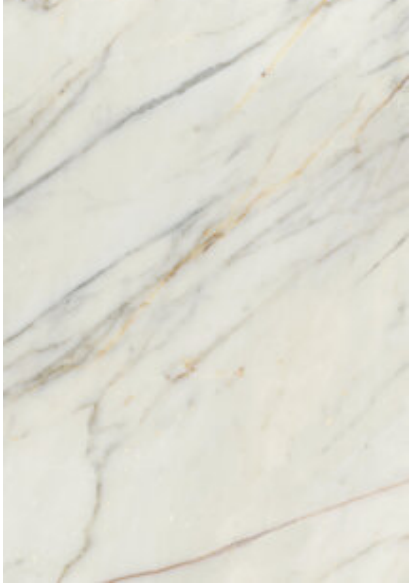

CALACATTA SLOW SOFT RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040834	120X280	6,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	3

ANTI-SLIP CHARACTERISTICS

Slip resistance (DCOF)	ANSI A326.3	> 0,42

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



CALACATTA SLOW POL RECT 120X280

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A039512	120X280	6,20	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

CALACATTA SLOW MATT 7,5X30

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038777	7,5X30	8,10	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	>10%
Flexion resistance	EN ISO 10545-04	=> 23 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

HEXAGON CALACATTA SLOW

13,9X16

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038712	13,9X16	8,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

HEXA BOHO CALACATTA SLOW
13,9X16



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038713	13,9X16	8,30	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GHA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

CARMEN
true tiles

EDGE STICK CALACATTA SLOW

1,5X30

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A038932	1,5X30	7,80	REVESTI



DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	Not pass the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.