APE
best *for* you

SUPREME MARBLE MATT RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043182	60X120	8,80	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

ANTI-SLIP SUPREME MARBLE STRU RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043184	60X120	8,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R10


This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

SUPREME MARBLE POL RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043026	60X120	9,40	PC BIA GL

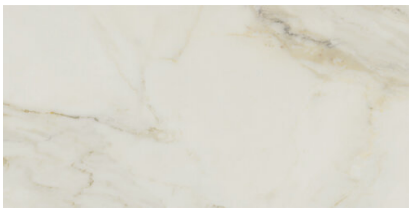

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

VOLPE MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043028	60X120	9,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm^2
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

SUPREME MARBLE MATT RECT 90X90



REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044304	90X90	9,40	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you



SUPREME MARBLE R10 RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A044260	60X60	8,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

ANTI-SLIP CHARACTERISTICS

Slip resistance (R)	EN 16165-B	R10

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.

APE
best *for* you

PELDAÑO RECTO ANT. C3
SUPREME MARBLE 33X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A043262	33X120	32,30	EXTRUSI



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requeriments

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 30 N/mm^2
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	Class 3
Slip resistance (R)	EN 16165-B	R11
Slip resistance (barefeet)	EN 16165-A	C

apegrupo

This document is commercial, with an informative nature relative to tested pieces. It cannot be used in legal or administrative proceedings, nor as an expert opinion or documentary proof. Images are not contractual.